

Fine Grade minipleat panel filters, utilising hydrophobic paper media and a high surface area to deliver good levels of filtration at a low pressure drop deficit.

Features

- MEDIA Hydrophobic Fibre Paper Minipleat
- SEPARATORS Hotmelt
- SEALANT Polyurethane
- CASE Galvanised Steel
- SEALS Optional
- FACE GRILLS - Optional


Operating Temperature

Continuous 80 °Centigrade, 120 °Centigrade MAX



Performance Data	
Filter Class Iso 16890	ePM₁₀>70%
Grade EN779:2012	M6
Rated Airflow	2.3m/second
Initial Pressure Drop	135Pa
Final Pressure Drop*	235Pa
Final Recommended Pressure Drop to EN13053:2019	

Pressure drop (Pa) Vs Velocity (m/sec)
NP642424 594x594x95

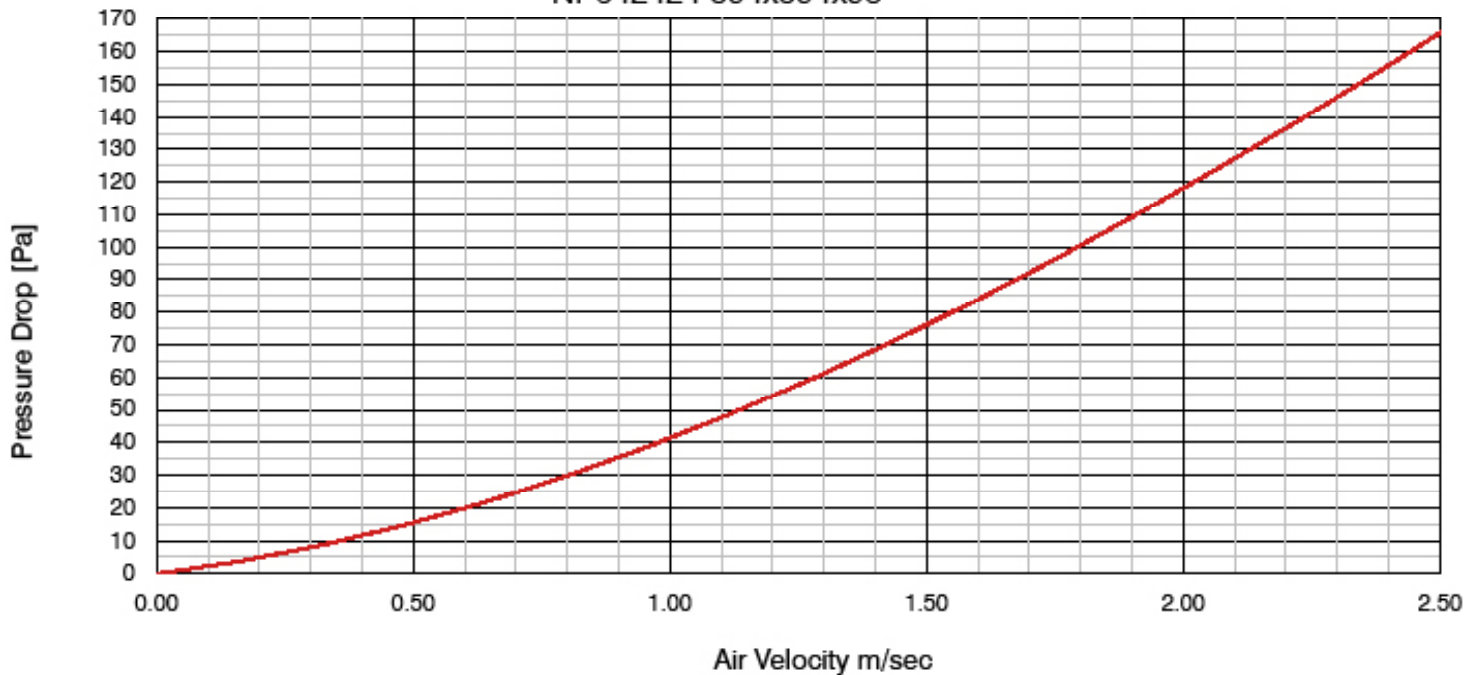

Email sales@jfilters.com
Telephone +44 (0)1278 452277

Part No.	Size Inches	Height (mm)	Width (mm)	Depth	Rated Airflow m ³ /hr
NP641212	12x12x4	292	292	95	705
NP641625	16x25x4	394	622	95	2030
NP642016	20x16x4	495	394	95	1615
NP642020	20x20x4	495	495	95	2030
NP642025	20x25x4	495	622	95	2550
NP642412	24x12x4	594	292	95	1435
NP642420	24x20x4	594	495	95	2435
NP642424	24x24x4	594	594	95	2920



Email sales@jfilters.com
Telephone +44 (0)1278 452277